

CAR ALARM

META SERVICE



TYPE OF CAR AND YEAR OF MANUFACTURE

JEEP GRAND CHEROKEE 2000

SHEET NO.

17.5

INSTALLATION POSITION

Central control units and accessories: under the dashboard on the driver's side.

Compact central units and sirens: in the engine compartment on the passenger's side near the radiator coolant recovery reservoir.

POWER SUPPLY

Positive: connect to a shunt in the fuse box.

Negative: use a connection pre-engineered by the car maker.

ENGINE IMMOBILISATION

Original car outfitting includes an engine immobiliser with transponder that activates automatically when the ignition key is removed from the ignition switch.

KEY POSITIVE (+15)

Connect to the blue wire in the ignition switch.

CENTRAL LOCKING

Connect to the pink/black and orange/black wires in the 15-pin white connector of the push button panel in the door on the driver's side, to the pink/purple and orange/purple wires in the 15-pin white connector of the push button panel in the door on the passenger's side, and comply with the indications in **ANNEX 17.5.1**.

TURNING INDICATORS

ATTENTION: NEGATIVE COMMAND.

Connect to the blue/pink wire (position N° 9) in the 11-pin white connector on the steering column near the turn indicator switch.

DOOR PROTECTION

Front doors: connect to the brown/red wire in the 15-pin white connector of the push button panel in the door on the driver's side and to the brown/red wire in the 15-pin white connector of the push button panel in the door on the passenger's side.

Rear doors: connect to the brown/green wire on the output from the door on the driver's side and to the brown/yellow wire on the output from the door on the passenger's side.

BONNET PROTECTION

Bonnet: use the button in the kit.

PASSIVE ANTI-THEFT DEVICE ACTUATION

Install anti-theft device M750 as indicated in assembly **ANNEX 17.5.2**.



THE INFORMATION GIVEN IN THE MANUAL IS PURELY INDICATIVE AND SHOULD BE VERIFIED BEFORE MAKING ANY CONNECTIONS AS THE CAR MANUFACTURERS MAY MAKE MODIFICATIONS WITHOUT PRIOR NOTICE. META SYSTEM DECLINES ANY LIABILITY FOR DAMAGE TO THE VEHICLE CAUSED BY INCORRECT INSTALLATION.

CAR ALARM

META SERVICE




TYPE OF CAR AND YEAR OF MANUFACTURE

JEEP GRAND CHEROKEE 2000

ENCLOSURE

17.5.1

CENTRAL LOCKING

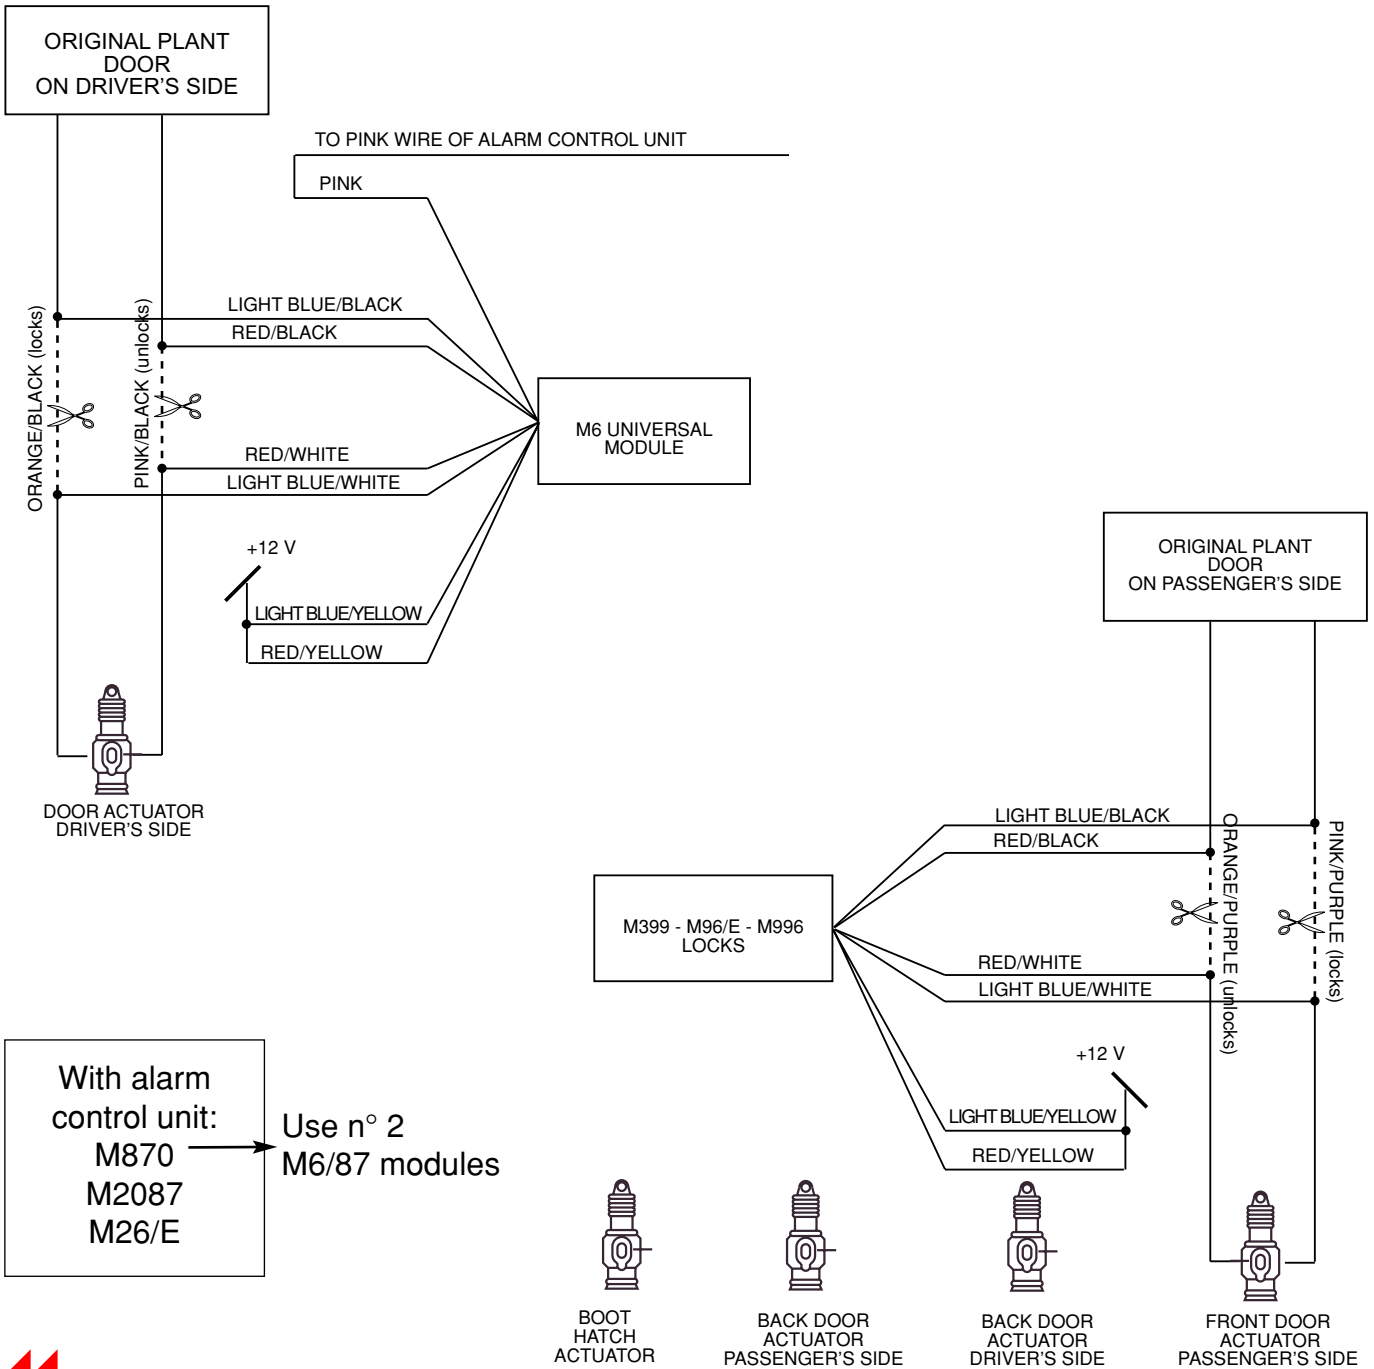

THE INFORMATION GIVEN IN THE MANUAL IS PURELY INDICATIVE AND SHOULD BE VERIFIED BEFORE MAKING ANY CONNECTIONS AS THE CAR MANUFACTURERS MAY MAKE MODIFICATIONS WITHOUT PRIOR NOTICE. META SYSTEM DECLINES ANY LIABILITY FOR DAMAGE TO THE VEHICLE CAUSED BY INCORRECT INSTALLATION.

CAR ALARM

META SERVICE



TYPE OF CAR AND YEAR OF MANUFACTURE

JEEP GRAND CHEROKEE 2000

ENCLOSURE

17.5.2

INSTALLATION ANNEX M750/3

Function	M750 wire color	Vehicle Wire Colour	Location in vehicle
Arming command	red/black	orange/black	In the 15-pin white connector in the button panel of the door on the driver's side
Disarming command	red/white	pink/black	(pos. 9) in the 11-pin white connector on the steering column near the turning indicator switch
Arm./Inhib.	light blue/yellow	blue/pink	



THE INFORMATION GIVEN IN THE MANUAL IS PURELY INDICATIVE AND SHOULD BE VERIFIED BEFORE MAKING ANY CONNECTIONS AS THE CAR MANUFACTURERS MAY MAKE MODIFICATIONS WITHOUT PRIOR NOTICE. META SYSTEM DECLINES ANY LIABILITY FOR DAMAGE TO THE VEHICLE CAUSED BY INCORRECT INSTALLATION.