


## 95 & up Volvo 850 door locks

The door lock switch wires on this vehicle alternate in resting at ground depending on the current door lock state. To operate the door locks with an alarm/remote starter, the opposing switch wire must be opened. For example, when the lock wire is pulsed to ground, the unlock wire must be opened. The following diagram will allow you to interface an aftermarket alarm/remote starter with the door locks in this vehicle.

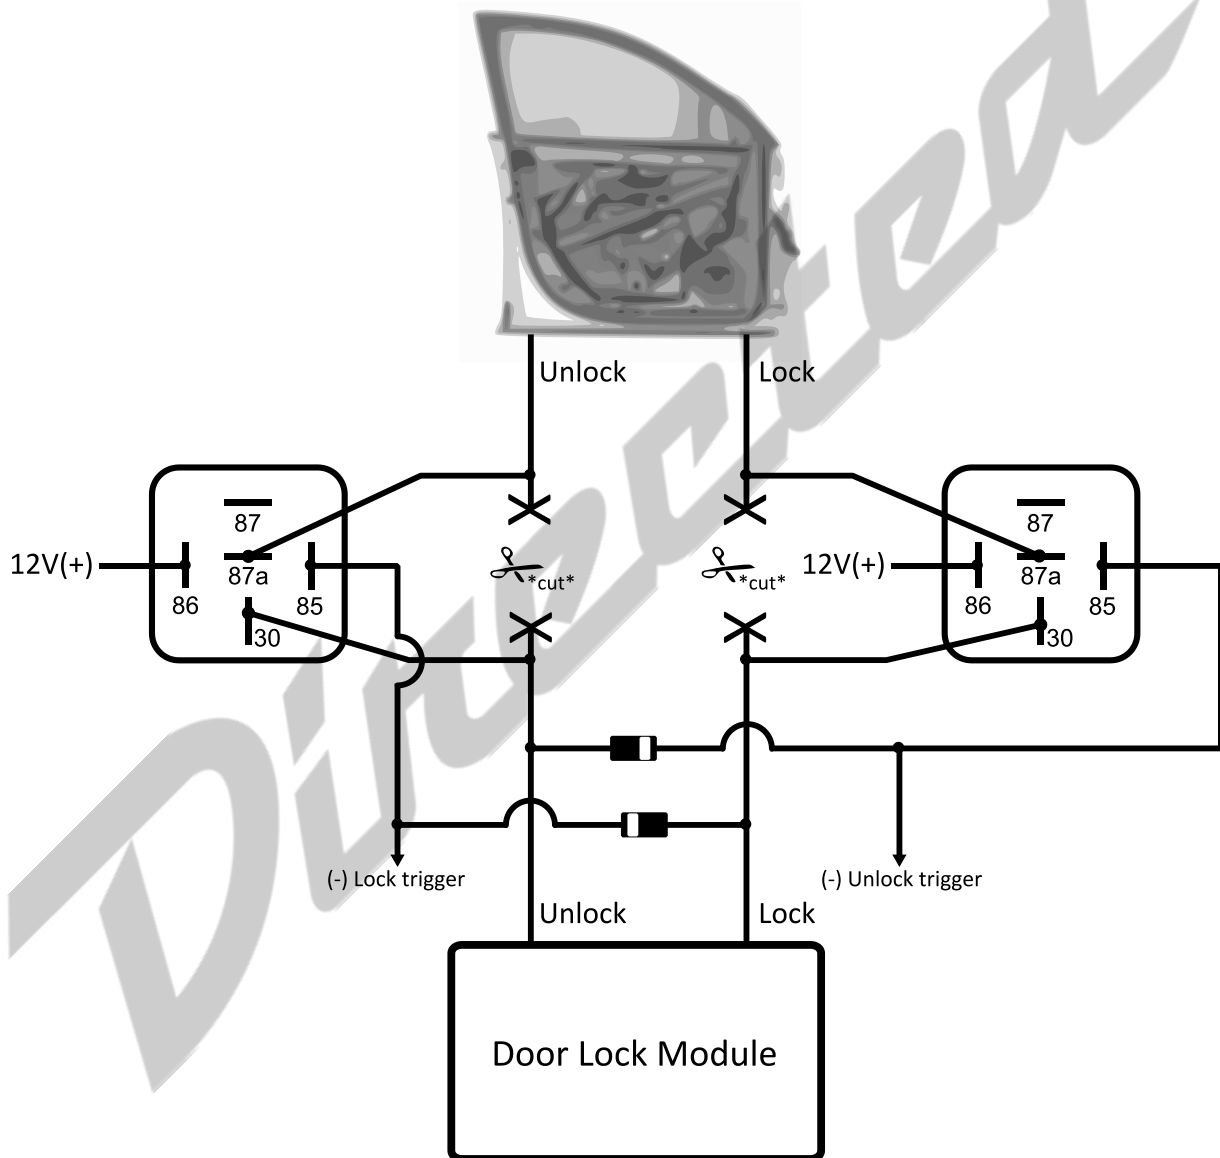

**IMPORTANT!** This wiring information is being provided free of charge on an "as is" basis, without any representation or warranty. It is the dealer's responsibility to verify any circuit before interfacing with it using a digital multi-meter. Directed Electronics assumes no responsibility with regards to the accuracy or currency of this information. Proper installation in every case remains the responsibility of the installer. Directed Electronics assumes no liability or responsibility resulting from an improper installation, even in reliance of this information.